



# ROLLERS

CONVEYOR BELT SYSTEMS

DESIGN, FABRICATION AND SUPPLY OF CONVEYOR BELTS

WWW.LUFH-CBS.COM





# INDEX

<b>LUFH CONVEYOR BELT SYSTEMS</b>	04
<b>TYPES OF ROLLERS</b>	06
Metallic Rollers	
HDPE and UHMWPE Plastic Rollers	
Composite Rollers	
Impact Rollers	
Rubber Disc Return Rollers	
Pipe Conveyor Rollers	
<b>TYPES OF IDLER STATIONS</b>	08
Troughing Idlers	
Impact Idlers	
Garland Idlers	
Return Idler Stations	
Transition Idlers	
<b>ROLLER ORDER CODING</b>	10
<b>SHAFT ENDS</b>	12
<b>IDLERS ACCORDING TO ITS APPLICATION</b>	14
<b>TROUGHING IDLERS</b>	15
Equal Troughing Idlers	
Unequal Troughing Idlers	
Low Profile Idlers	
Self-Aligning Troughing Idlers	
<b>IMPACT IDLERS</b>	23
Equal Impact Troughing Idlers	
Unequal Impact Troughing Idlers	
<b>RETURN IDLER STATION</b>	27
Self-Aligning Return Idlers	
V-Return Idlers	
Return Idlers	
Flat Idlers	
Rubber Disc Return Idlers	
Disc Flat Idler	
<b>ROLLER DATA SHEET</b>	33

# LUFH-CBS


**LUFH Conveyor Belt Systems**, supplies high quality and hight performance rollers and idlers, with excellent follow-through technical support and after-sales service. Our products are specialized for the oil, mining, industrial and construction fields, thus fulfilling the applicable requirements of the interested parties for the client's satisfaction. LUFH seeks excellence through continuous improvement of the Quality Management System by employing highly competent and motivated human talent, and by having adequate facilities and instruments that allow us to meet high quality standards.

Our technical department is able to provide improvement proposals based on an innovative approach and adapting to the needs or demands of the client. We put special emphasis on meeting customer requirements with reliability and punctuality, providing guarantee and after-sales service.

Our products are in accordance with **KS, DIN, ISO, CEMA, JIS** Quality Standards and others upon customer request.





**"Seeking excellency through the continuous improvement of our Quality Management System"**



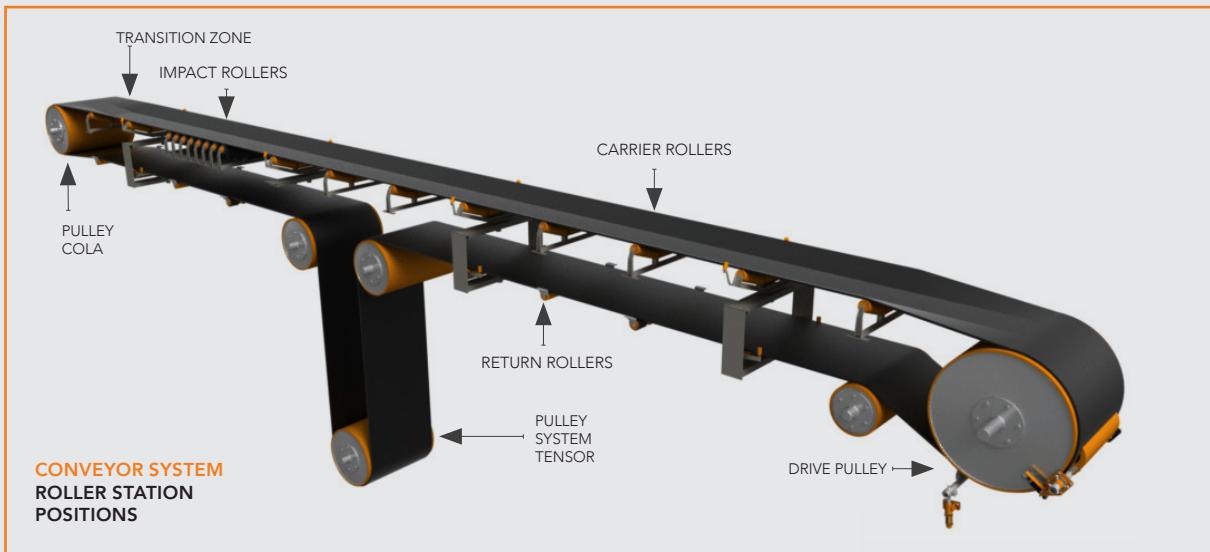

## General characteristics OF LUFH ROLLERS


Industrial belt conveyor systems are designed to transport bulk cargo from one point to another, by means of a special rubber belt, mounted between the main and other auxiliary pulleys, supported in its route by different types of rollers. **LUFH-CBS** designs, selects and manufactures these elements with strict quality controls to ensure a long service lifespan and to provide a free rolling belt, so that the system works regularly, reliable and aligned.

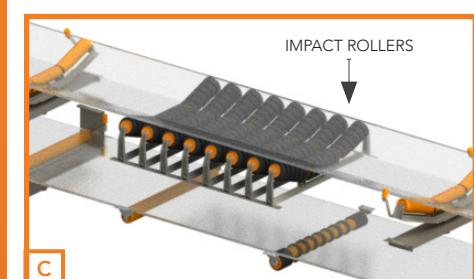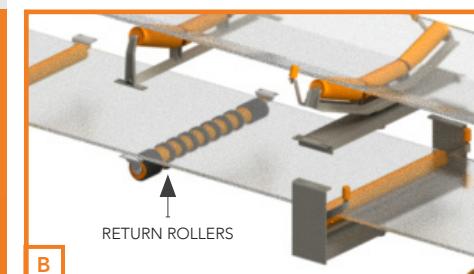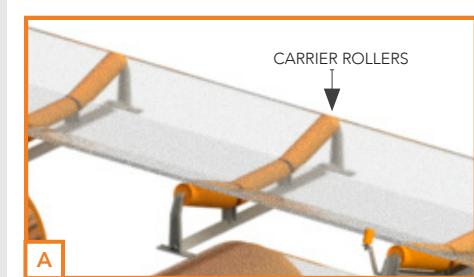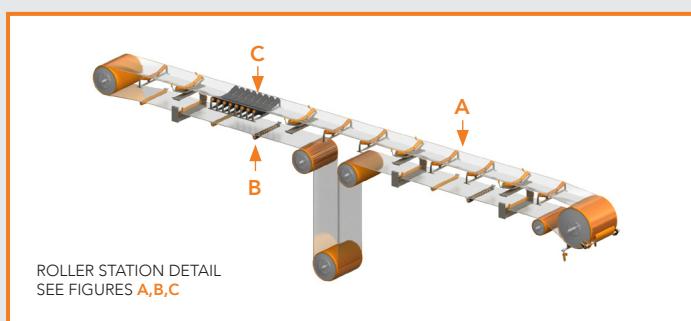

## PRODUCTION CAPACITY


**LUFH-CBS** has a high-tech manufacturing and automation process, which allows us to produce rollers according to high international standards, performance, and quality.




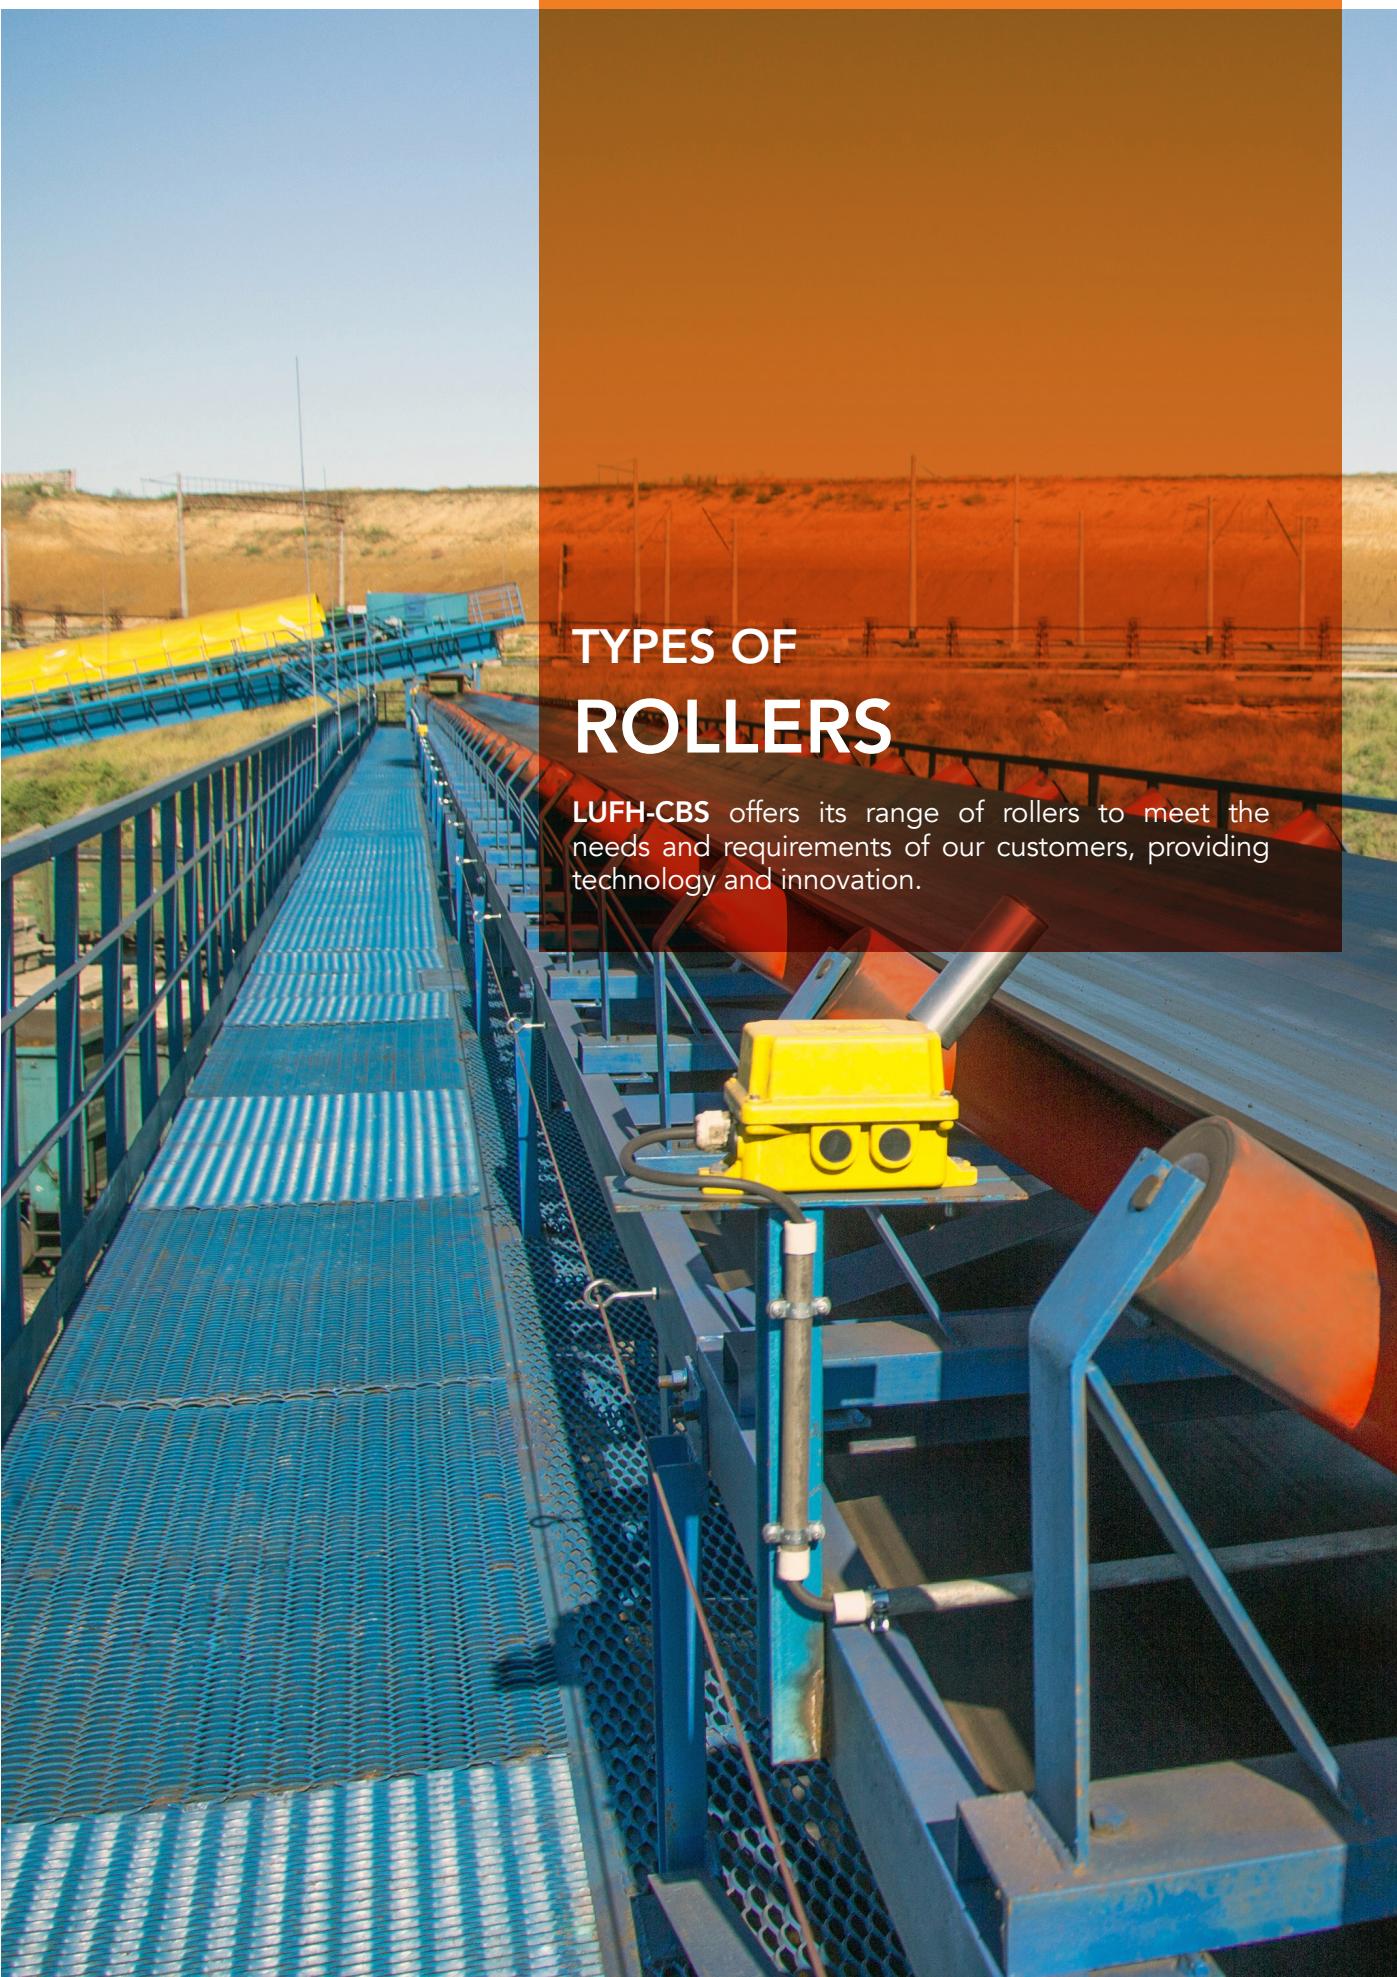

## **TYPES OF ROLLERS**


**LUFH-CBS** offers its range of rollers to meet the needs and requirements of our customers, providing technology and innovation.

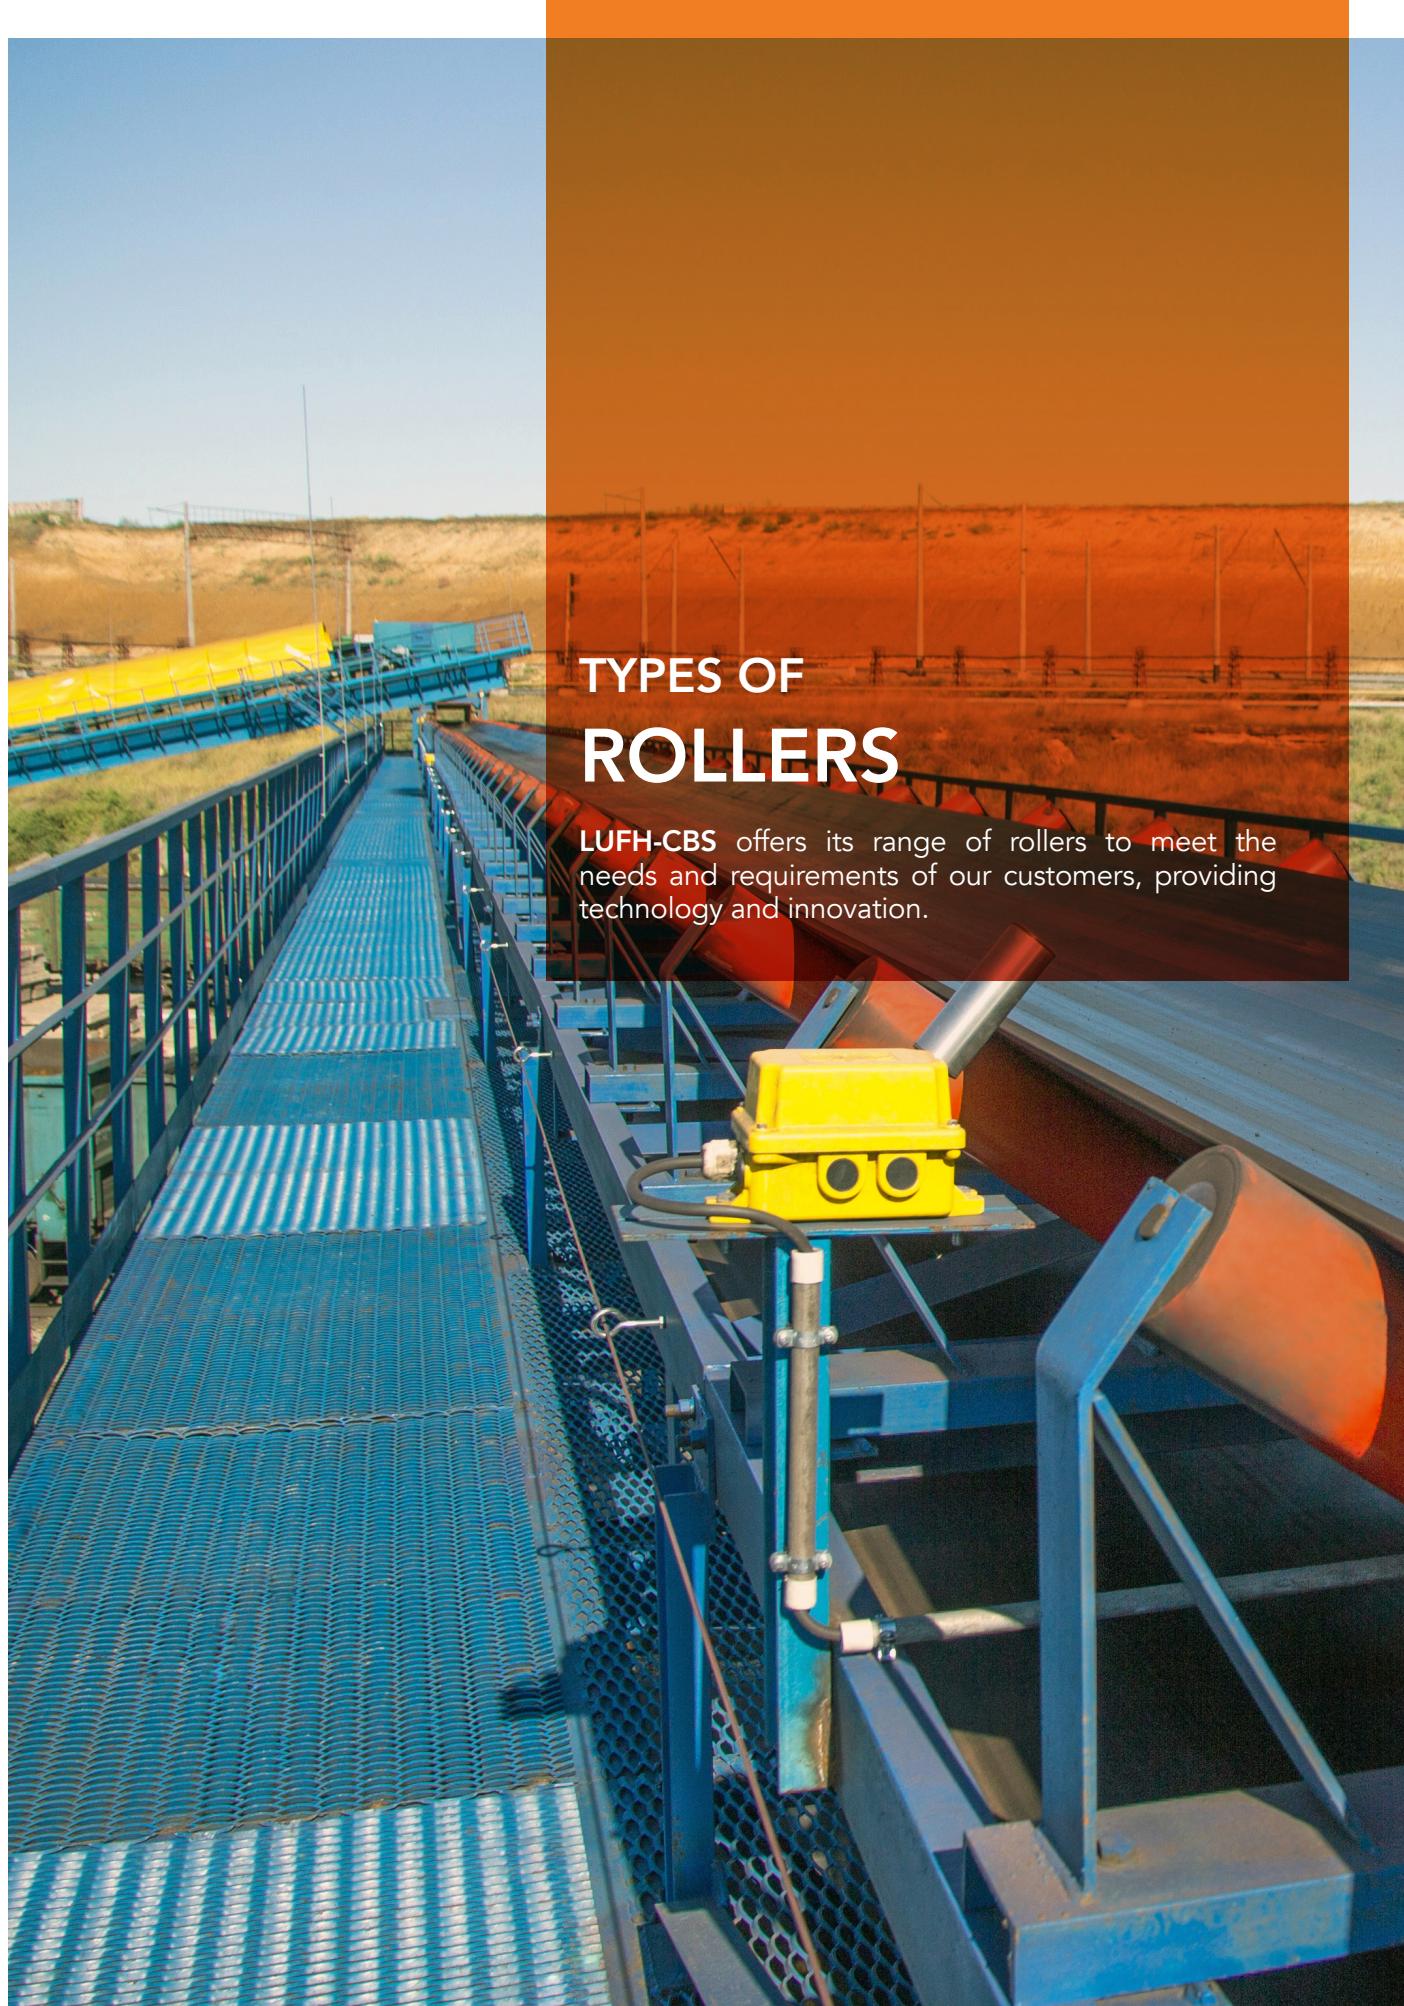

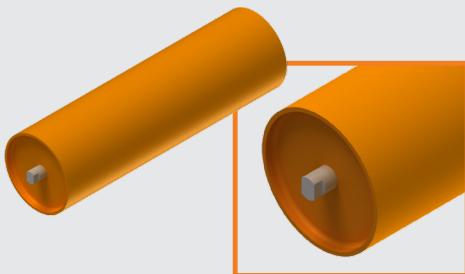


## Metal ROLLERS

Metal rollers which are commonly used for carrier and / or return stations consist of a steel shaft, and a steel shell with a tube wall thickness of between 3-5 mm.

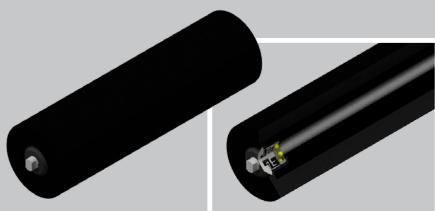


## HPDE and UHMWPE Plastic Rollers ROLLERS

Consists of a steel shaft and HDPE (High Density Polyethylene) or UHMWPE (Ultra High Molecular Weight Polyethylene) casing. Has superior corrosion and abrasion resistance. This plastic shaft cover minimizes the noise. Light in weight, 15-20% less compared to a steel roller.

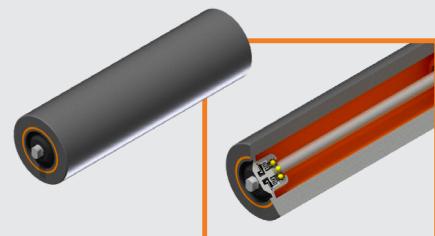


## Composite ROLLERS

Specially designed for high moisture and sticky material conditions. Consists of a steel shaft and a casing composed of polypropylene and additives that improve roller performance. Has a high corrosion and wear resistance, a radial runout (T.I.R)  $\leq 0.1$ . It is fire resistant and antistatic. Maximizes bearing life.

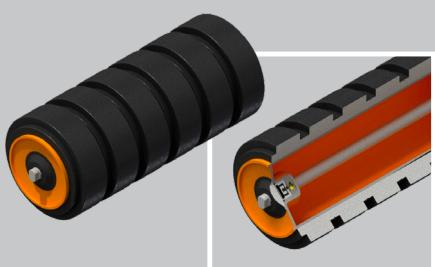


## Impact ROLLERS

It consists of a reusable shaft with the facility to replace the rubber discs, or with a single grooved rubber liner, featuring a design that maximizes impact absorption in the conveyor loading zone.

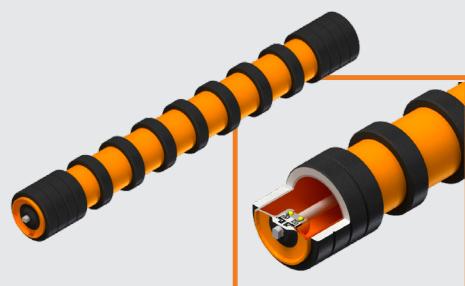


## Rubbers Discs RETURN ROLLERS

It comes with a reusable shaft with the facility to replace the rubber discs or with a single grooved liner. Its design prevents the uncoupling of the rubber discs, they can be manufactured with rubber discs type A (Oval Disc) or type B (Flat Disc).

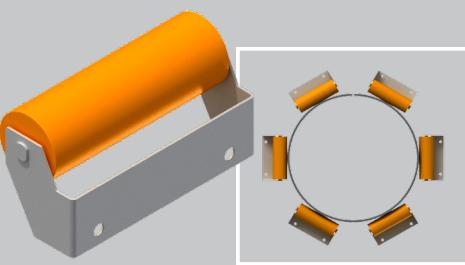



## Pipe Conveyor ROLLERS

These high quality and durability rollers are for application in transport systems with tubular belts. They provide perfect resistance to water and dust, prolonging their useful life (IP55 protection standard). The best T.I.R value (less than 0.5 mm).

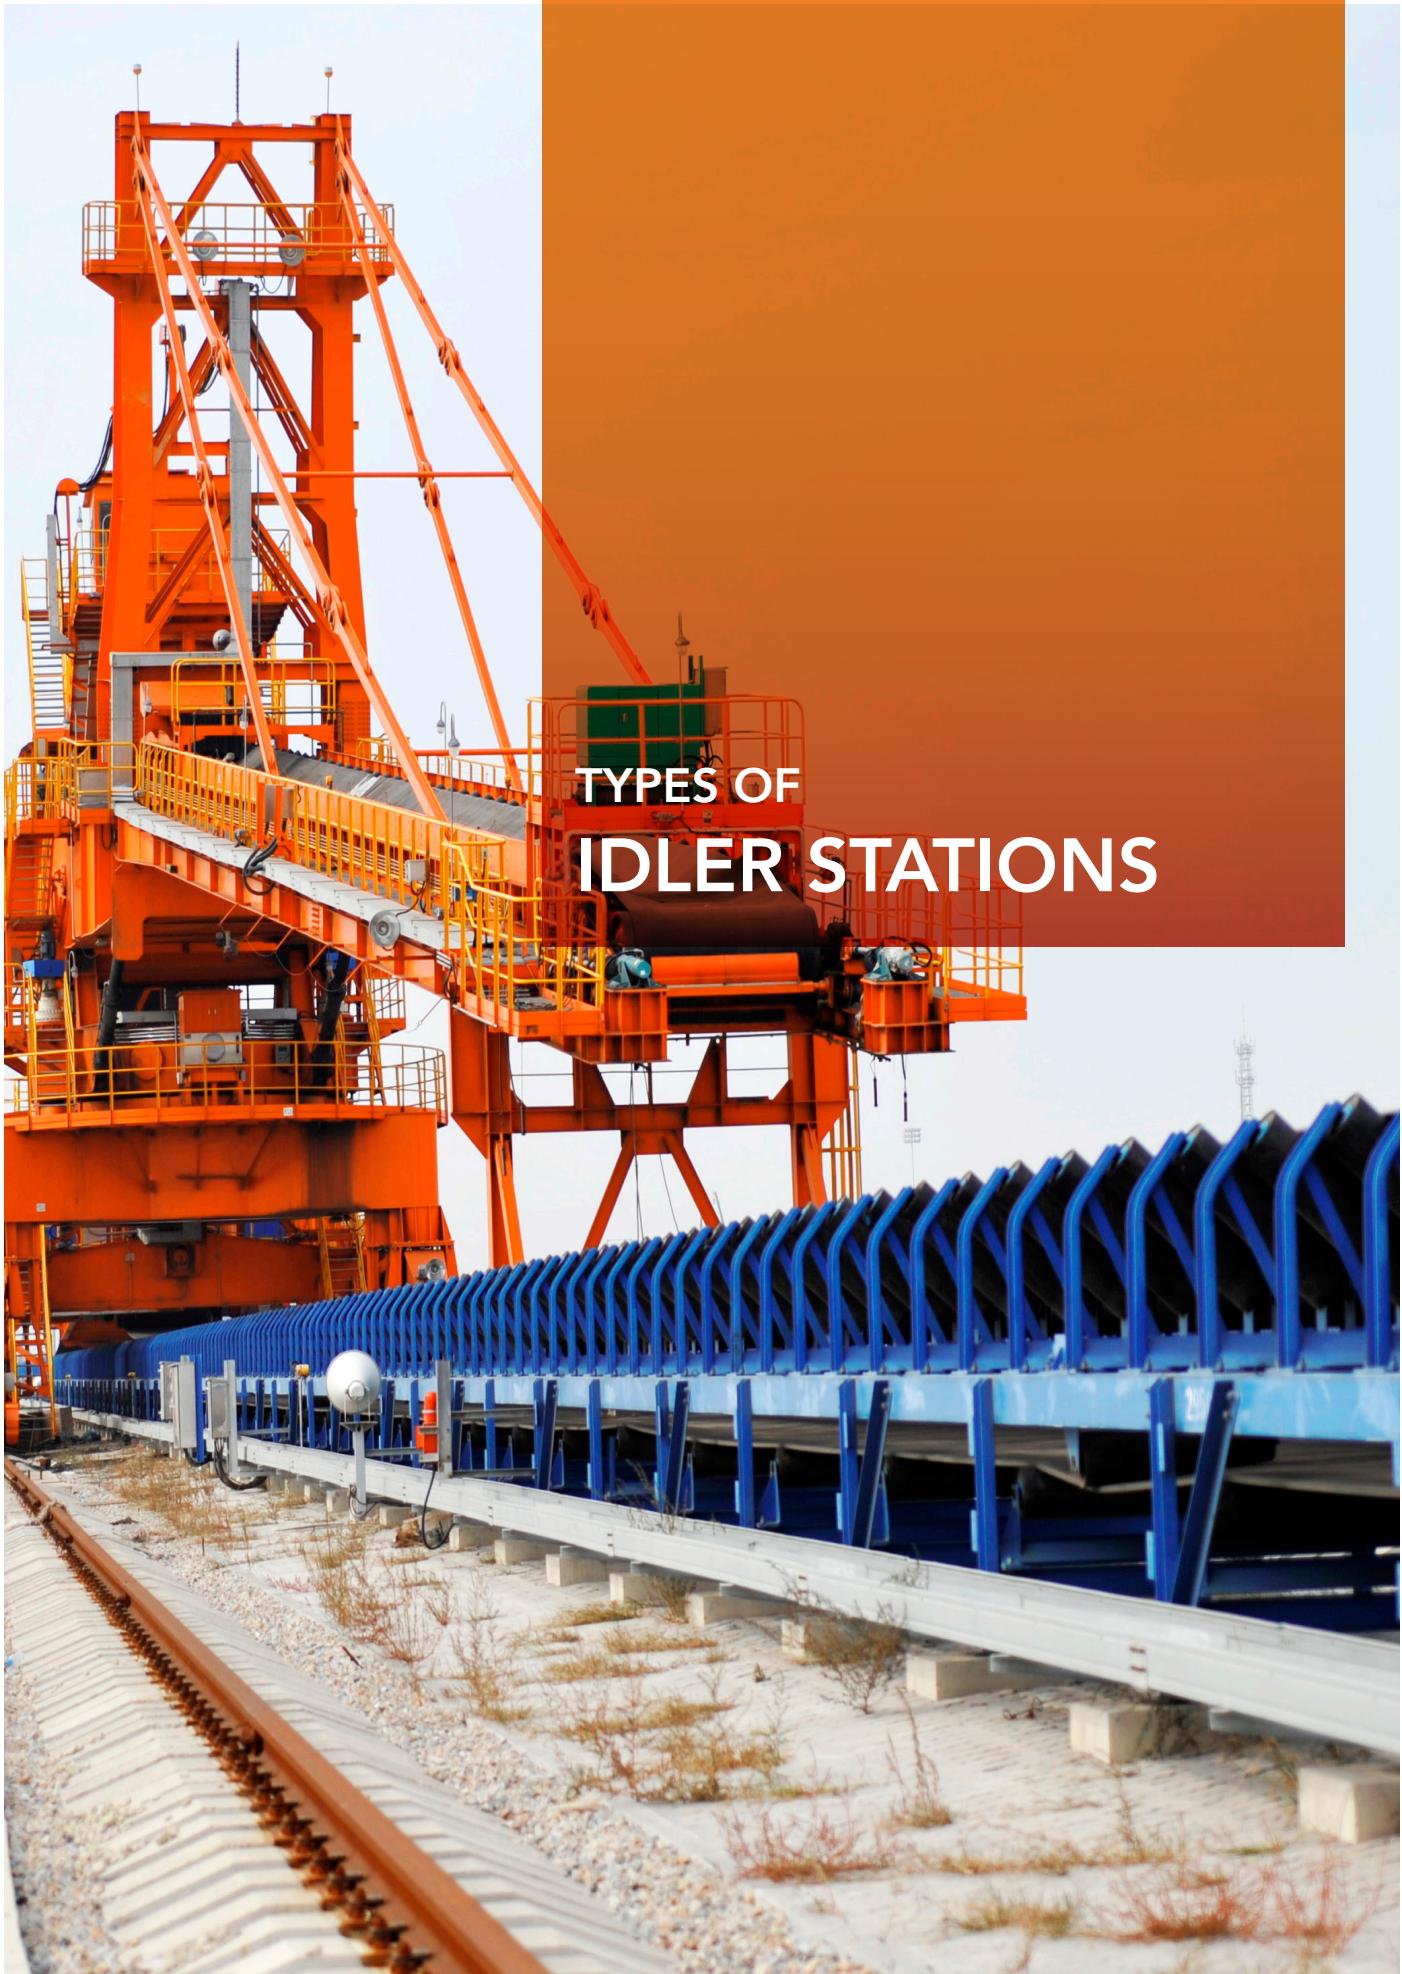A large industrial conveyor system, primarily painted orange, is shown against a clear blue sky. The conveyor consists of a tall support tower with multiple levels of walkways and ladders, a long horizontal section supported by blue idler stations, and a lower section. In the foreground, a set of railway tracks runs parallel to the conveyor. A large orange rectangular overlay covers the right side of the image, containing white text.


## **TYPES OF IDLER STATIONS**

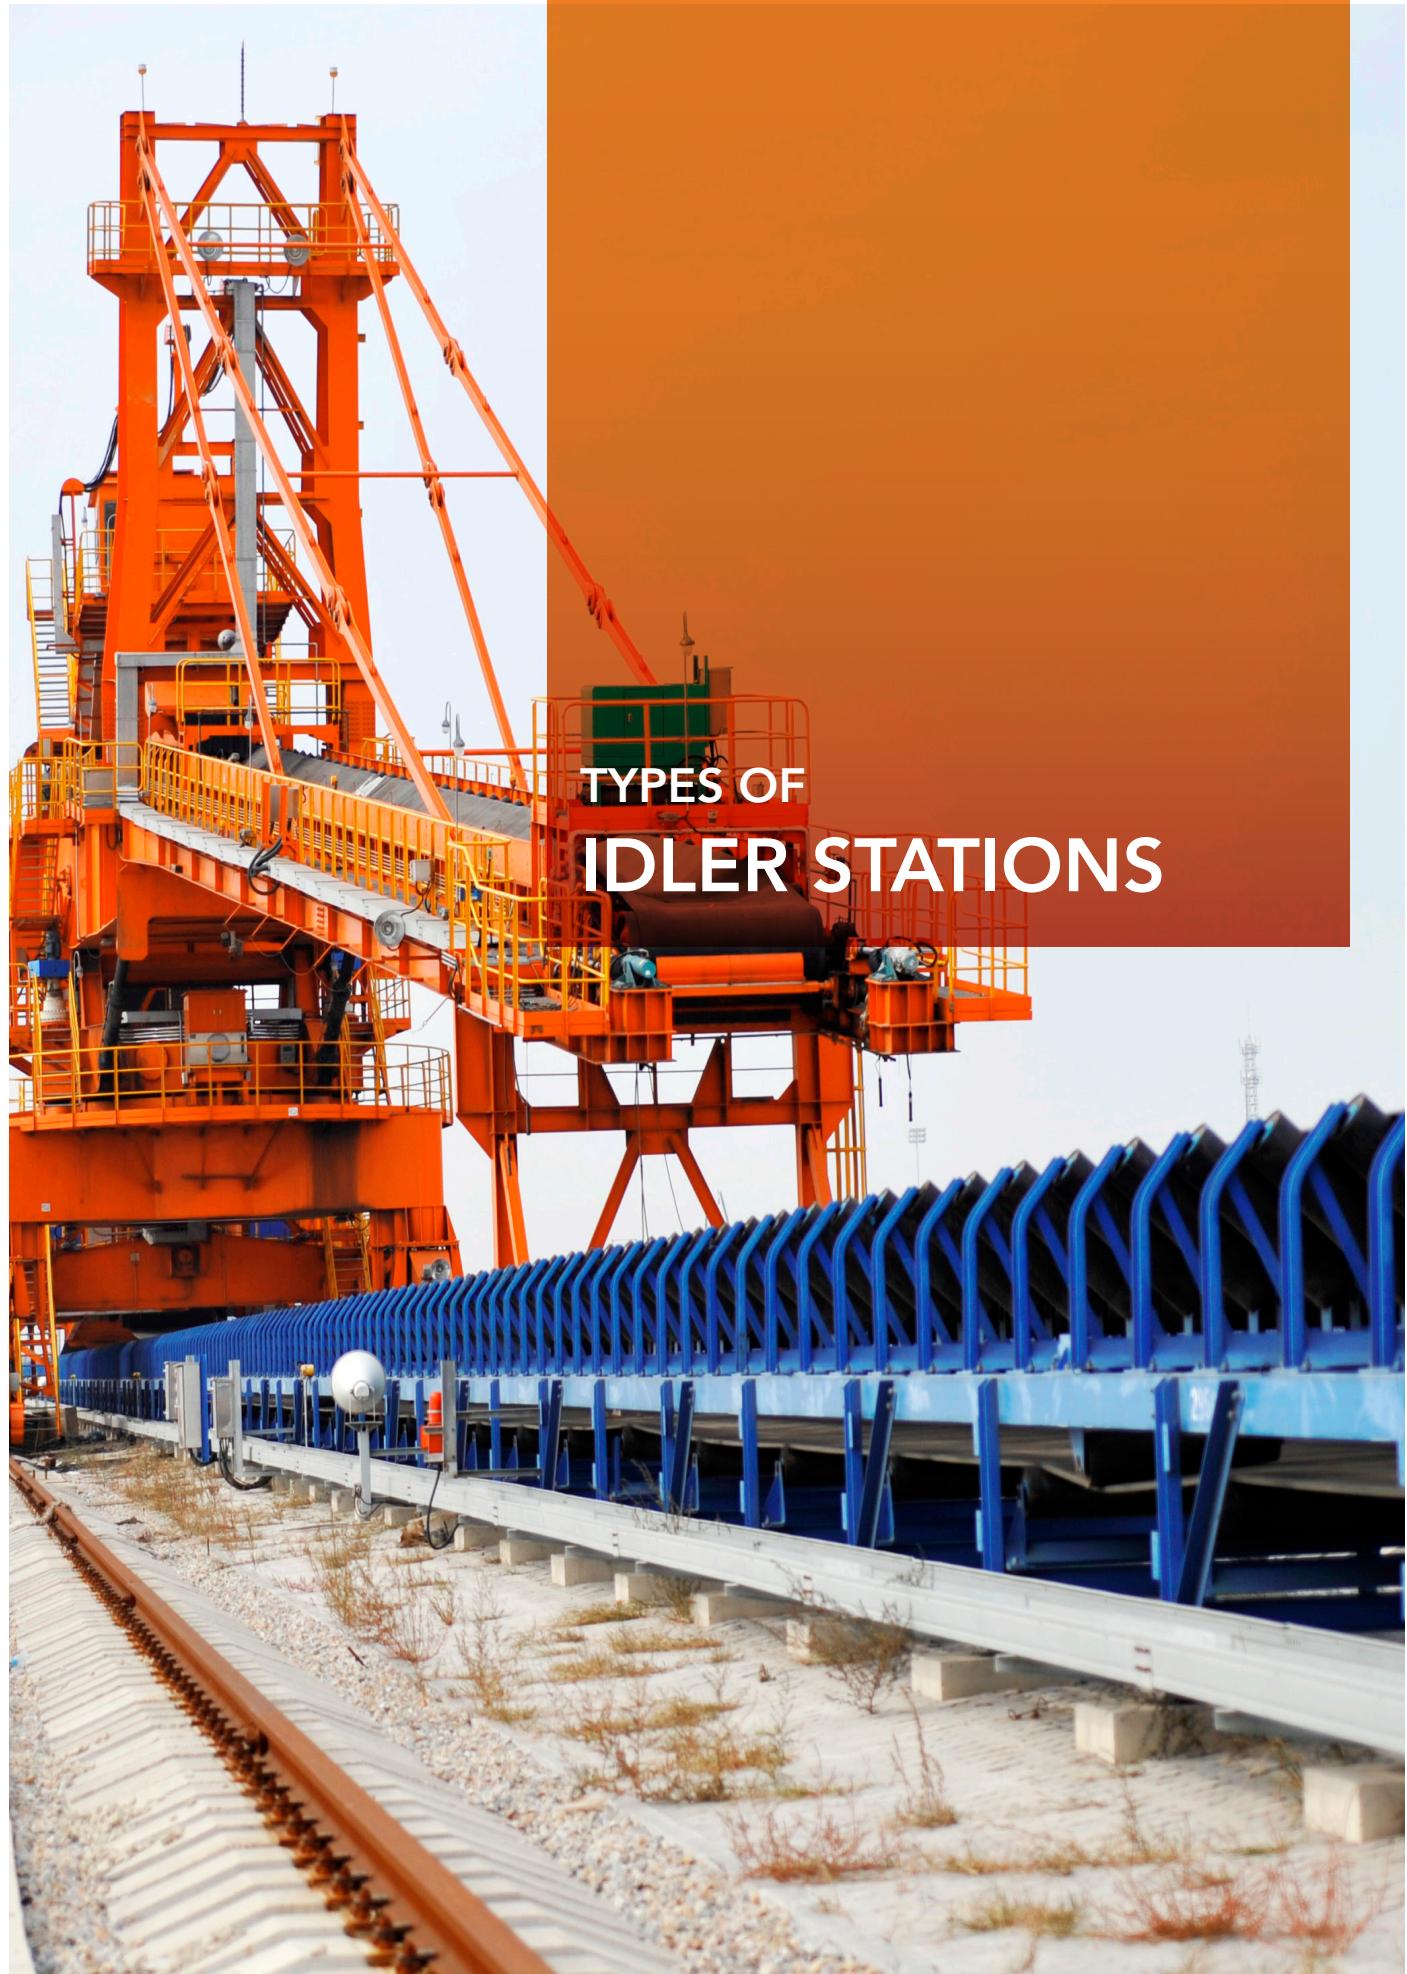

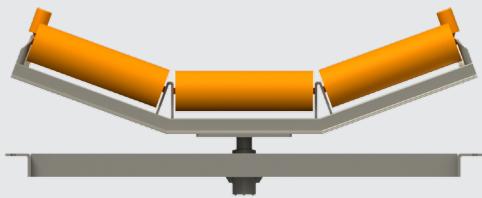

## Troughing IDLERS

These belt supports are generally made up of three rollers; one central and two wing rollers inclined between 20 and 40 degrees, supported by a metal base or frame that can be fixed or self-aligning.

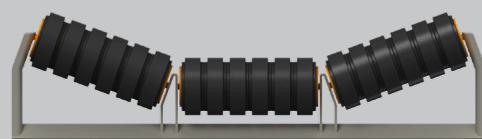


## Impact IDLERS

They are the support points of the belt in the loading area of the conveyor; these are generally made up of three rollers, one central and two inclined that can have 20 to 45 degrees, supported by a metal base or frame. Its special feature is that the rollers are manufactured with a rubber ring cover, which absorbs the energy of the impact generated by the mineral falling on the belt and reduce the belt's deterioration.



## Garland IDLERS

Carrier and impact stations can also be hanging, garland or catenary type, for special applications where it is necessary to avoid the traditional metal base, as well as to improve impact absorption and load adaptability.

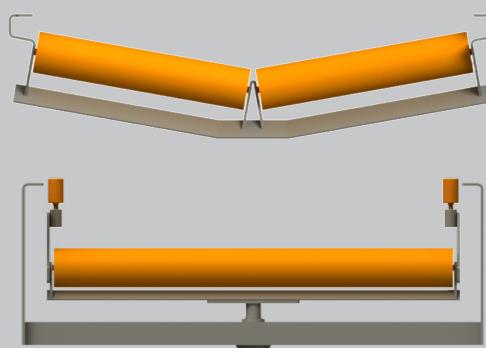

## Return IDLER STATION


These support points of the belt in their return path, are generally formed by a horizontal roller or two rollers forming a V, the latter with inclinations of 5, 10 and 15 degrees, supported by a metal base or frame that can be fixed or self-aligning. The rollers can be smooth metal, with rubber rings or spiral-shaped surface to reduce the accumulation of material on the surface of the roller and to detach the adhered material from the surface of the belt.



## Transition IDLERS

These are the belt support points in the load transition area between the end pulley and the last normally inclined roller. These are generally formed by three rollers supported by a metal base or frame. The side rollers are supplied according to the angle required in the transition area.

## Roller ORDER CODING

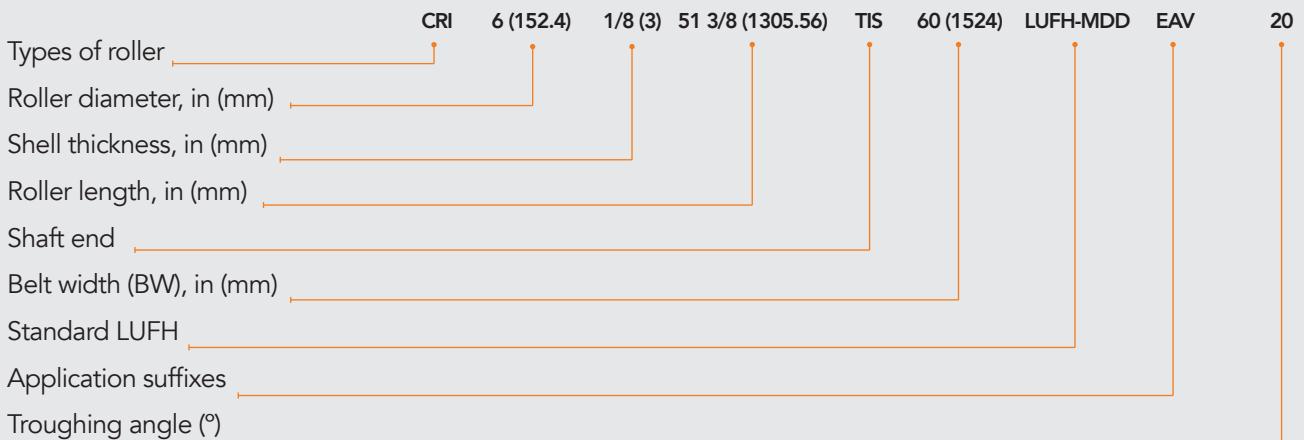

## Roller CODE

CODE	DESCRIPTION	
CRI	Equal troughing roller	
CRU	Unequal troughing roller	
CRH	HPD roller	
CRC	Composite roller	
IR	Impact roller	
NIR	Unequal impact roller	
RR	Return roller	
RRD	Rubber discs return roller	
RRH	HPD return roller	
RRC	Composite return roller	
SPR	Spiral return roller	
PSK	Pipe conveyor roller	
LS	Live Shaft	

## Aplication CODE

CODE	DESCRIPTION	
ECRI	Equal troughing idlers	
ECRU	Unequal troughing idlers	
ECIR	Equal impact troughing idlers	
ECIRU	Unequal impact troughing idlers	
ECAT	Self aligning troughing idlers	
ERV	V- Return idlers	
ERAT	Self aligning return idlers	
ERBP	Low profile channel	
CT	Garland idlers	
EAV	Transition idlers	

\*OTHERS: Request advice from our Technical Department.

**STANDARD LUFH-CBS****• LUFH-LDB:**

Light duty rollers, diameters 4" and 5"

**• LUFH-MDC:**

Medium duty rollers, diameters 5" and 6"

**• LUFH-MDD:**

Medium duty rollers, diameters 5" and 6"

**• LUFH-HDE:**

Heavy duty rollers, diameters 6" and 7"

## Example OF ROLLER ORDER CODING


Idler rollers									
Units	CRI	6	1/8	51 3/8	TIS	60	LUFH-MDD	ECRI	20
(in)									

Idler rollers									
Units	CRI	6	1/8	51 3/8	TIS	60	LUFH-MDD	-	-
(in)									





SHAFT  
ENDS

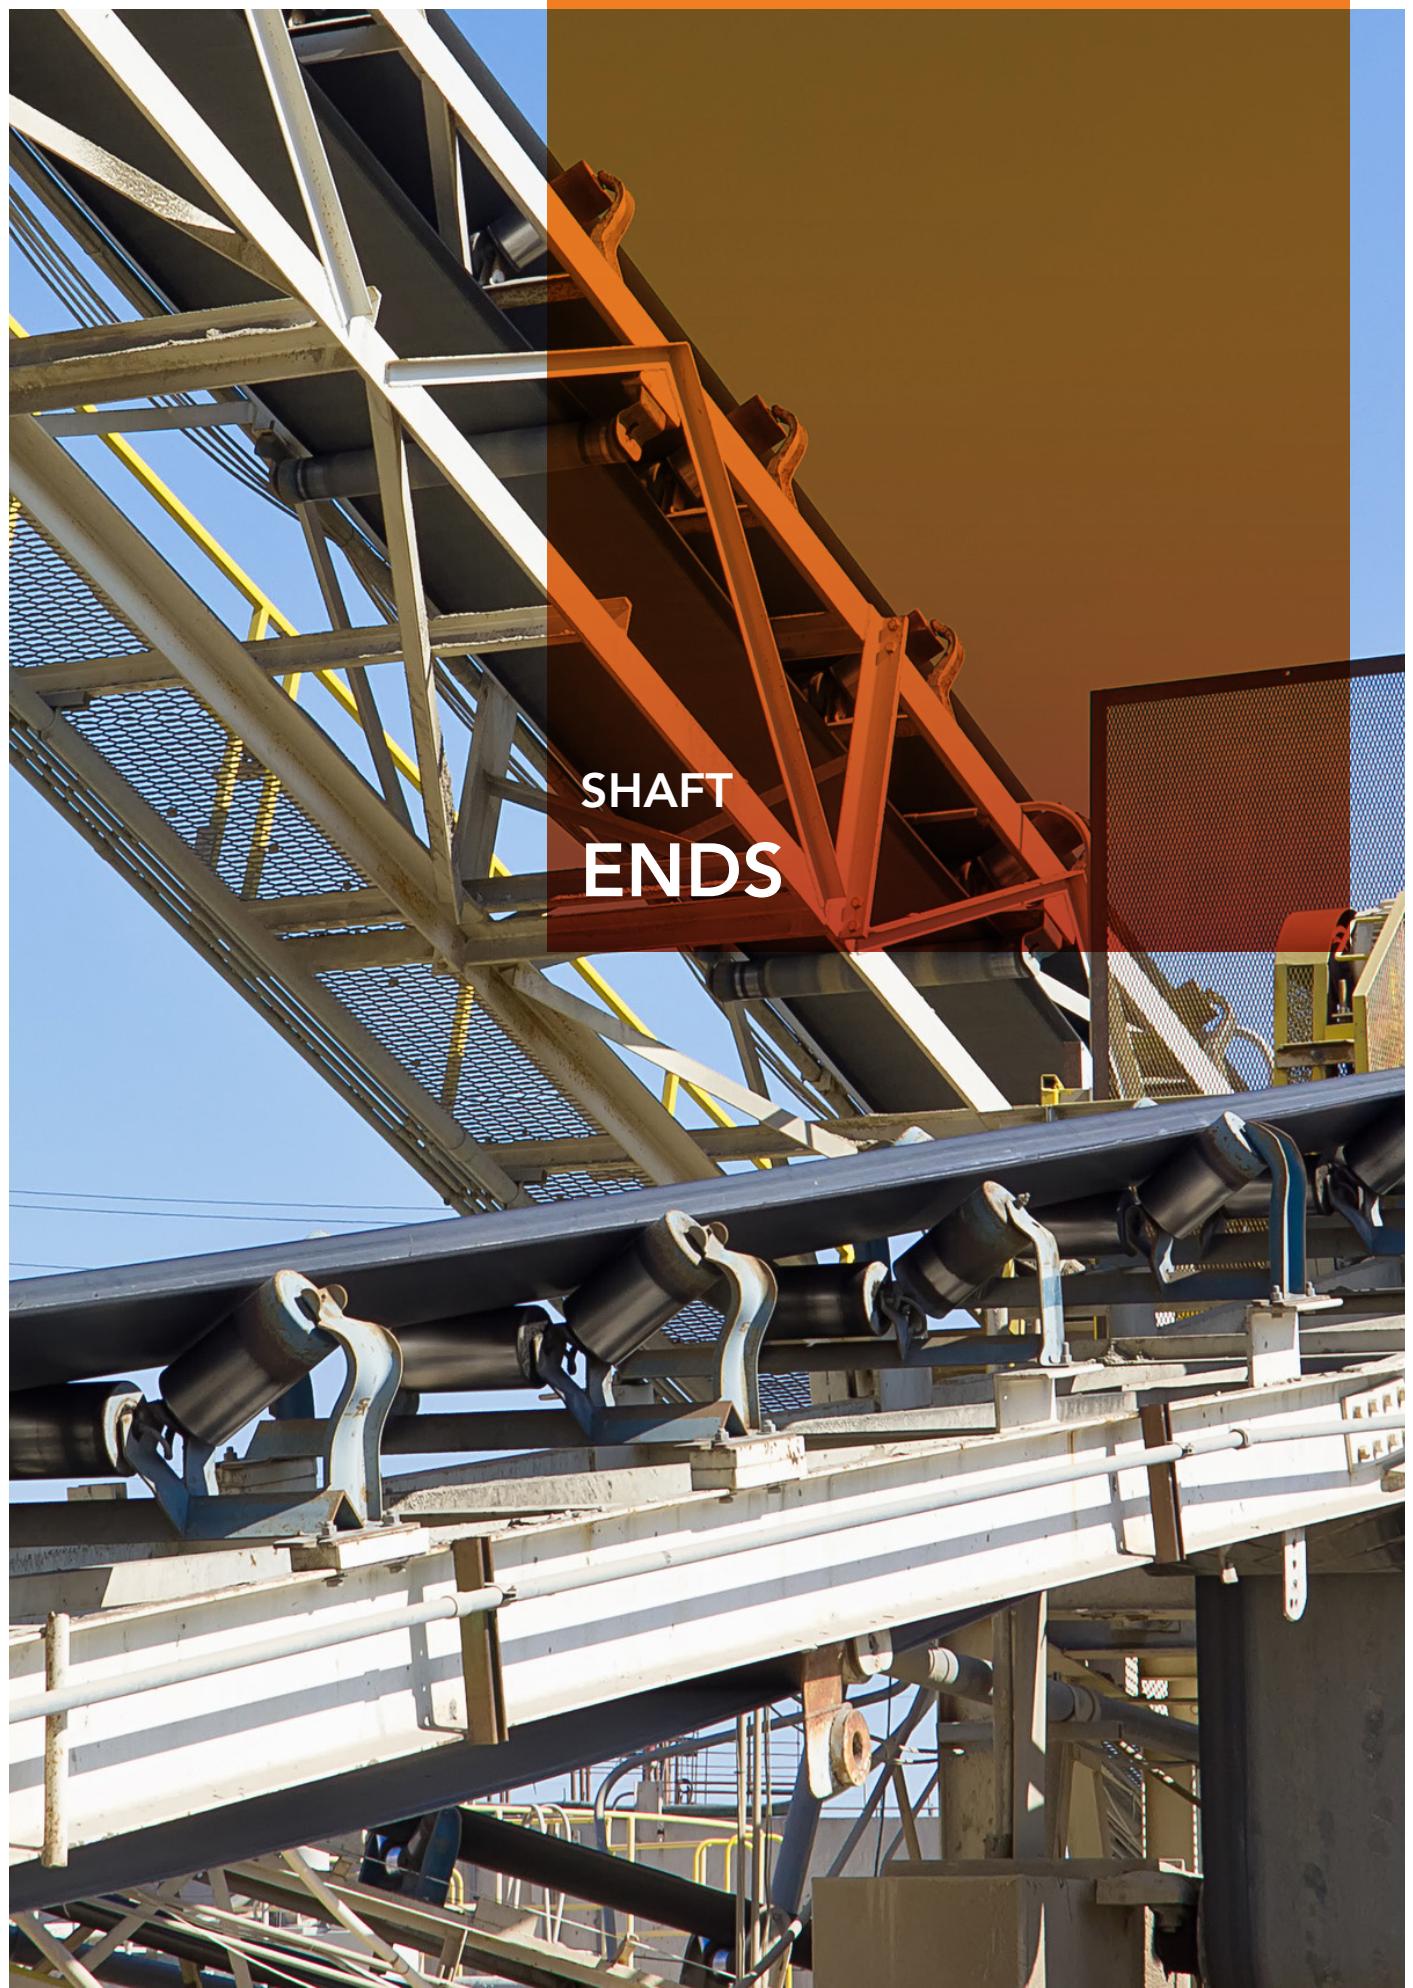

CODE / TIS		DIMENSIONS		
DESCRIPTION INTERNAL SINGLE FLAT		d	20	25
		b1	17	22
m	4 10	4	10	
n	9 38	12	38	
a	5 5	5	5	
-----				

CODE / TID		DIMENSIONS		
DESCRIPTION INTERNAL DOUBLE FLAT		d	20	25
		b2	14 15	18 20
m	4 10	4	10	
n	9 38	12	38	
a	5 5	5	5	5
-----				


CODE / TS		CODE / TD		DIMENSIONS					
DESCRIPTION SINGLE FLAT		DESCRIPTION DOUBLE FLAT		d	20	25	30	35	40
				b1	17	22	27	32	37
m	n	b2	n	b2	14	18	22	27	32
m	4	m	4	m	4	4	4	4	4
n	9	n	12	n	12	12	12	12	12
a	--	--	--	--	--	--	--	--	--

CODE / THS		DIMENSIONS		
DESCRIPTION HEXAGONAL SHAFT		m	n	s
		4	14	4

CODE / TIT		DIMENSIONS		
DESCRIPTION INTERNAL THREAD		d	m	n
		M10	4	3

CODE / THN		DIMENSIONS		
DESCRIPTION EXTERNAL THREAD AND NUT		d	m	n
		M10	10	18
		M12	10	20
		M16	10	25
		M20	10	30
		-----		


CODE / TGH		DIMENSIONS								
DESCRIPTION GARLAND WITH HOLE		d	20	25	30	35	40	45	50	
		d1	8,5 11	11 13	13 15	15	15	17	21	
m	10 10	10 10	20 24	24	24	20	20	20	20	
n	- -	- -	- -	- -	- -	- -	- -	- -	- -	
p	10 12	12 15	15 16	16	16	16	20	20	24	
b	Apply chamfer up to d=45mm; from d=50mm apply fillet equal to the value expressed for p.									

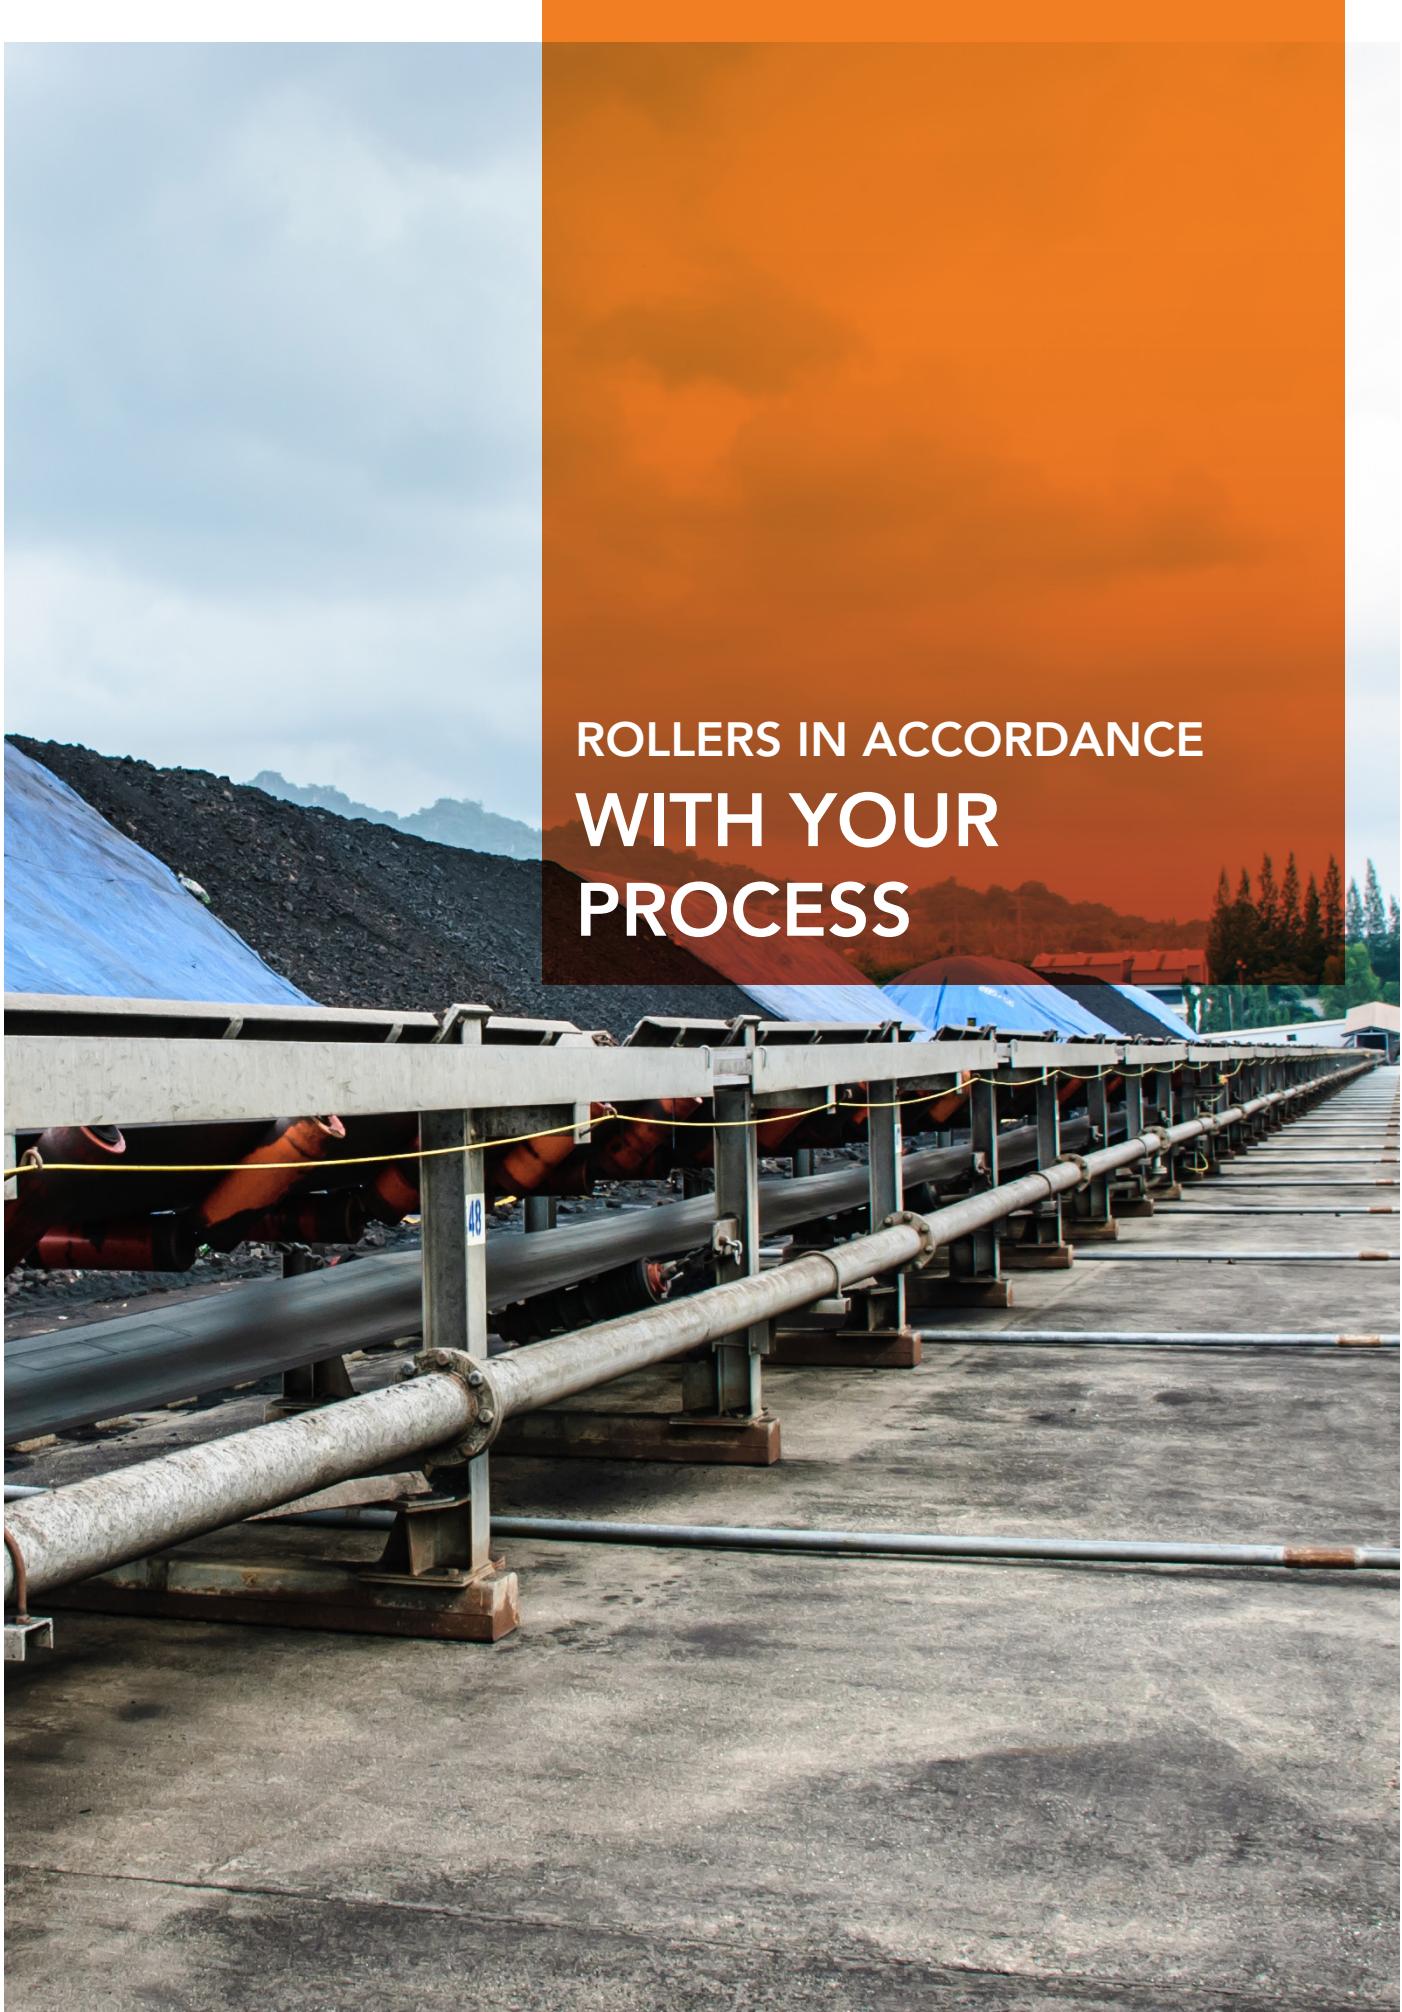

ROLLERS IN ACCORDANCE  
WITH YOUR  
PROCESS

## CARRIER


# Equal TROUGHING IDLERS

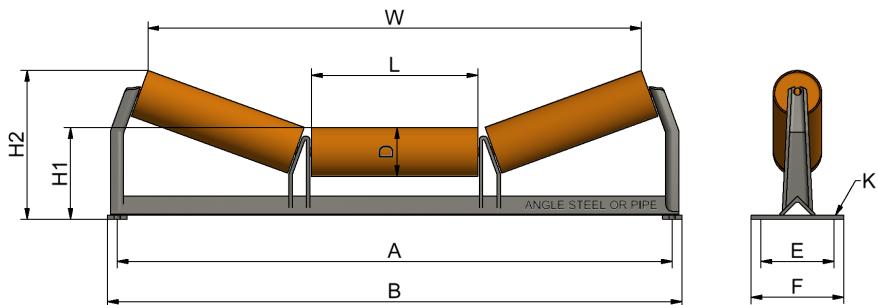

Troughing Angle	Belt Width	LUFH-LDB CEMA B												ROLLER DIAMETER																							
		A				B				L				E				F				K				H <sub>1</sub>		H <sub>2</sub>		W		H <sub>1</sub>		H <sub>2</sub>		W	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm				
20	14	356	23	584	25	635	6 1/16	154	6	152	8	203	1/2	13	7	178	9 1/16	230	16 15/16	430																	
	16	406	25	635	27	686	6 1/16	154	6	152	8	203	1/2	13	7	178	9 1/16	230	18 1/4	464																	
	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8	203	10 7/16	265	21 1/16	535	8 1/2	216	11	279	21 7/8	556											
	24	610	33	838	35	889	9 1/16	230	6	152	8	203	1/2	13	8	203	11 3/16	284	27 15/16	710	8 1/2	216	11 11/16	297	27 5/8	702											
	30	762	39	991	41	1041	11 1/8	283	6	152	8	203	1/2	13	8 1/8	206	12 1/8	308	33 5/8	854	8 5/8	219	12 9/16	319	33 3/8	848											
	36	914	45	1143	47	1194	13 1/4	337	6	152	8	203	1/2	13	8 1/8	206	12 13/16	325	39 3/4	1010	8 5/8	219	13 5/16	338	39 7/16	1002											
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	13 15/16	354	46 1/16	1170	9	229	14 7/16	367	45 3/4	1162											
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	13 3/8	340	51 11/16	1313	9	229	14 7/16	367	50 5/8	1286											
35	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8	203	12 1/8	308	19 3/8	492	8 1/2	216	12 3/8	314	19 7/16	494											
	24	610	33	838	35	889	9 1/16	230	6	152	8	203	1/2	13	8	203	13 3/8	340	25 5/16	643	8 1/2	216	13 13/16	351	24 11/16	627											
	30	762	39	991	41	1041	11 1/8	283	6	152	8	203	1/2	13	8 1/8	206	14 3/4	375	30 15/16	786	8 5/8	219	15 3/16	386	30 3/8	772											
	36	914	45	1143	47	1194	13 1/4	337	6	152	8	203	1/2	13	8 1/8	206	15 15/16	405	36 1/2	927	8 5/8	219	16 3/8	416	35 15/16	913											
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	17 5/8	448	42 5/16	1075	9	229	18 1/16	459	41 3/4	1060											
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	18 7/16	468	46 3/8	1178	9	229	18 7/8	479	45 13/16	1164											
	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8	203	13 3/16	335	18 1/8	460	8 1/2	216	13 3/8	340	17 15/16	456											
	24	610	33	838	35	889	9 1/16	230	6	152	8	203	1/2	13	8	203	14 11/16	373	22 3/16	564	8 1/2	216	15 1/16	383	22 3/4	578											
45	30	762	39	991	41	1041	11 1/8	283	6	152	8	203	1/2	13	8 1/8	206	16 3/8	416	28 11/16	729	8 5/8	219	16 3/4	425	28 1/16	713											
	36	914	45	1143	47	1194	13 1/4	337	6	152	8	203	1/2	13	8 1/8	206	17 7/8	454	33 7/8	860	8 5/8	219	18 3/16	462	33 1/8	841											
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	19 13/16	503	39 1/8	994	9	229	20 1/8	511	38 7/16	976											
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	8 1/2	216	21 7/16	545	41 1/2	1054	9	229	21 3/16	538	42 1/16	1068											



## Equal TROUGHING IDLERS

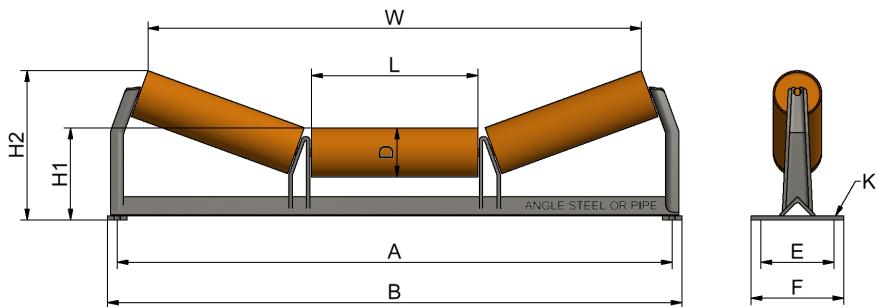

LUFH-MDC <sub>CEMA C</sub>														ROLLER DIAMETER												
														5"						6"						
														127 mm						152.4 mm						
Troughing Angle	Belt Width		A		B		L		E		F		K		H <sub>1</sub>		H <sub>2</sub>		W		H <sub>1</sub>		H <sub>2</sub>		W	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
20	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8 1/2	216	11	279	21 7/8	556	9	229	11 7/16	291	21 9/16	548
	24	610	33	838	35	889	9 1/16	230	6	152	9 1/2	241	1/2	13	8 1/2	216	11 11/16	297	27 5/8	702	9	229	12 1/8	308	27 5/16	694
	30	762	39	991	41	1041	11 1/8	283	6	152	9 1/2	241	1/2	13	8 5/8	219	12 9/16	319	33 3/8	848	9 1/8	232	13 1/16	332	32 15/16	837
	36	914	45	1143	47	1194	13 1/4	337	6	152	9 1/2	241	1/2	13	8 5/8	219	13 5/16	338	39 7/16	1002	9 1/8	232	13 3/4	349	39 1/8	994
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	9	229	14 7/16	367	45 3/4	1162	9 1/2	241	14 7/8	378	45 7/16	1154
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	9	229	14 7/8	378	50 5/8	1286	9 1/2	241	15 3/8	391	50 5/16	1278
	54	1372	63	1600	65	1651	19 1/16	484	9	229	11	279	5/8	16	9	229	15 3/4	400	56 7/16	1434	9 1/2	241	16 1/8	410	56 1/16	1424
	60	1524	69	1753	71 1/2	1816	21 1/16	535	9	229	11	279	5/8	16	9	229	16 1/2	419	62 3/16	1580	9 1/2	241	16 3/4	425	61 7/8	1572
35	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8 1/2	216	12 3/8	314	19 7/16	494	9	229	13 1/16	332	18 7/8	479
	24	610	33	838	35	889	9 1/16	230	6	152	9 1/2	241	1/2	13	8 1/2	216	13 13/16	351	24 11/16	627	9	229	14 3/16	360	24 1/8	613
	30	762	39	991	41	1041	11 1/8	283	6	152	9 1/2	241	1/2	13	8 5/8	219	15 3/16	386	30 3/8	772	9 1/8	232	15 11/16	398	29 13/16	757
	36	914	45	1143	47	1194	13 1/4	337	6	152	9 1/2	241	1/2	13	8 5/8	219	16 3/8	416	35 15/16	913	9 1/8	232	16 13/16	427	35 7/16	900
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	9	229	18 1/16	459	41 3/4	1060	9 1/2	241	18 7/16	468	41 3/16	1046
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	9	229	18 7/8	479	45 13/16	1164	9 1/2	241	19 1/4	489	45 1/4	1149
	54	1372	63	1600	65	1651	19 1/16	484	9	229	11	279	5/8	16	9	229	20	508	51 1/8	1299	9 1/2	241	20 7/16	519	50 1/2	1283
	60	1524	69	1753	71 1/2	1816	21 1/16	535	9	229	11	279	5/8	16	9	229	21 3/16	538	56 3/8	1432	9 1/2	241	21 9/16	548	55 13/16	1418
45	18	457	27	686	29	737	6 3/4	171	6	152	8	203	1/2	13	8 1/2	216	13 3/8	340	17 15/16	456	9	229	14	356	17 1/4	438
	24	610	33	838	35	889	9 1/16	230	6	152	9 1/2	241	1/2	13	8 1/2	216	15 1/16	383	22 3/4	578	9	229	15 7/16	392	22 1/16	560
	30	762	39	991	41	1041	11 1/8	283	6	152	9 1/2	241	1/2	13	8 5/8	219	16 3/4	425	28 1/16	713	9 1/8	232	17 1/16	433	27 3/8	695
	36	914	45	1143	47	1194	13 1/4	337	6	152	9 1/2	241	1/2	13	8 5/8	219	18 3/16	462	33 1/8	841	9 1/8	232	18 9/16	471	32 5/16	821
	42	1067	51	1295	53	1346	15 7/16	392	7 1/2	191	9 1/2	241	5/8	16	9	229	20 1/8	511	38 7/16	976	9 1/2	241	20 1/2	521	37 11/16	957
	48	1219	57	1448	59	1499	17 1/16	433	7 1/2	191	9 1/2	241	5/8	16	9	229	21 3/16	538	42 1/16	1068	9 1/2	241	21 9/16	548	41 3/8	1051
	54	1372	63	1600	65	1651	19 1/16	484	9	229	11	279	5/8	16	9	229	22 7/8	581	46 15/16	1192	9 1/2	241	23	584	46 3/16	1173
	60	1524	69	1753	71 1/2	1816	21 1/16	535	9	229	11	279	5/8	16	9	229	24 1/16	611	51 3/4	1314	9 1/2	241	24 3/8	619	51	1295








Troughing Angle	Belt Width	LUFH-MDD <sub>CEMA D</sub>												ROLLER DIAMETER														
														5"						6"								
														127 mm						152.4 mm								
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			
20	24	610	33	838	35	889	15 7/16	392	5 7/16	138	6	152	8	203	1/2	13	7	178	9 1/16	230	26 15/16	684	7 1/2	191	9 7/16	240	26 9/16	675
	30	762	39	991	41	1041	21 3/8	543	5 7/16	138	6	152	8	203	1/2	13	7	178	9 1/16	230	32 7/8	835	7 1/2	191	9 7/16	240	32 1/2	826
	36	914	45	1143	47	1194	27 3/8	695	5 7/16	138	6	152	8	203	1/2	13	7	178	9 1/16	230	38 7/8	987	7 1/2	191	9 7/16	240	38 1/2	978
	42	1067	51	1295	53	1346	33 3/8	848	5 7/16	138	7 1/2	191	9 1/2	241	5/8	16	7 1/2	191	9 9/16	243	44 7/8	1140	8	203	9 15/16	252	44 1/2	1130
	48	1219	57	1448	59	1499	39 3/8	1000	5 7/16	138	7 1/2	191	9 1/2	241	5/8	16	7 1/2	191	9 9/16	243	50 7/8	1292	8	203	9 15/16	252	50 1/2	1283
	54	1372	63	1600	65	1651	45 3/8	1153	5 7/16	138	9	229	11	279	5/8	16	9	229	11	279	56 7/8	1445	9 1/2	241	11 7/16	291	56 9/16	1437
	60	1524	69	1753	71 1/2	1816	51 3/8	1305	5 7/16	138	9	229	11	279	5/8	16	9	229	11	279	62 7/8	1597	9 1/2	241	11 7/16	291	62 9/16	1589
35	72	1829	81	2057	83 1/2	2121	63 3/8	1610	5 7/16	138	9	229	11	279	5/8	16	9 1/2	241	11 3/8	289	74 7/8	1902	10	254	11 13/16	300	74 9/16	1894

Troughing Angle	Belt Width	LUFH-HDE <sub>CEMA E</sub>												ROLLER DIAMETER														
														6"						7"								
														152.4 mm						177.8 mm								
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm			
20	36	914	45	1143	47	1194	27 3/8	695	5 7/16	138	6	152	8	203	1/2	13	7	178	9 1/16	230	38 7/8	987	7 1/2	191	9 7/16	240	38 1/2	978
	42	1067	51	1295	53	1346	33 3/8	848	5 7/16	138	7 1/2	191	9 1/2	241	5/8	16	7 1/2	191	9 9/16	243	44 7/8	1140	8	203	9 15/16	252	44 1/2	1130
	48	1219	57	1448	59	1499	39 3/8	1000	5 7/16	138	7 1/2	191	9 1/2	241	5/8	16	7 1/2	191	9 9/16	243	50 7/8	1292	8	203	9 15/16	252	50 1/2	1283
	54	1372	63	1600	65	1651	45 3/8	1153	5 7/16	138	9	229	11	279	5/8	16	9	229	11	279	56 7/8	1445	9 1/2	241	11 7/16	291	56 5/9	1437
	60	1524	69	1753	71 1/2	1806	51 3/8	1305	5 7/16	138	9	229	11	279	5/8	16	9	229	11	279	62 7/8	1597	9 1/2	241	11 7/16	291	62 5/9	1589
	72	1829	81	2057	83 1/2	2110	63 3/8	1610	5 7/16	138	9	229	11	279	5/8	16	9 1/2	241	11 3/8	289	74 7/8	1902	10	254	11 13/16	300	74 9/16	1894
	84	2134	93	2362	95 1/2	2426	71 3/4	1822	7 1/2	191	12	305	14	356	3/4	19	11 5/8	295	14 3/8	365	88 1/8	2238	12 1/8	308	14 13/16	376	87 3/4	2229
	96	2438	105	2667	107 1/2	2731	83 3/4	2127	7 1/2	191	12	305	14	356	3/4	19	11 5/8	295	14 3/8	365	100 1/8	2543	12 1/8	308	14 13/16	376	99 3/4	2534



## Low PROFILE IDLERS

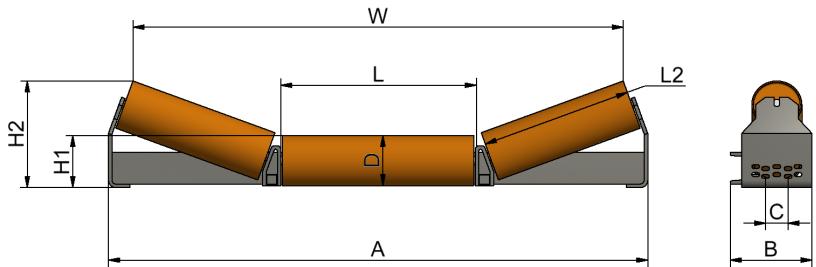

LUFH-MDC <sub>CEMA C</sub>										ROLLER DIAMETER										
Troughing Angle	Belt Width		A		L		L <sub>2</sub>		H <sub>1</sub>		H <sub>2</sub>		W		H <sub>1</sub>		H <sub>2</sub>		W	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
20	18	457	23 5/8	600	7 1/16	179	6 1/16	154	4 1/2	114	6 11/16	170	20 3/16	513	5	127	7 3/16	183	19 7/8	505
	24	610	29 5/8	752	11 1/16	281	7 1/16	179	4 1/2	114	7 1/16	179	26 1/8	664	5	127	7 9/16	192	25 13/16	656
	30	762	35 5/8	905	13 1/16	332	9 1/16	230	4 1/2	114	7 3/4	197	31 7/8	810	5	127	8 1/4	210	31 9/16	802
	36	914	41 5/8	1057	15 1/16	383	11 1/16	281	4 1/2	114	8 7/16	214	37 5/8	956	5	127	8 15/16	227	37 5/16	948
	42	1067	47 5/8	1210	17 1/16	433	13 1/16	332	4 1/2	114	9 3/32	231	43 7/16	1103	5	127	9 5/8	244	43 1/8	1095
	48	1219	53 5/8	1362	19 1/16	484	15 1/16	383	4 1/2	114	30 5/6	783	49 3/16	1249	5	127	10 5/16	262	48 7/8	1241
	54	1372	59 5/8	1514	21 5/16	541	17 1/16	433	4 1/2	114	10 1/2	267	55 1/4	1403	5	127	11	279	54 15/16	1395
	60	1524	65 5/8	1667	23 5/16	592	19 1/16	484	4 1/2	114	11 3/16	284	60 15/16	1548	5	127	11 11/16	297	60 5/8	1540
35	18	457	23 5/8	600	7 1/16	179	6 1/16	154	4 1/2	114	8 3/16	208	18 9/32	464	5	127	8 4/7	217	17 11/16	449
	24	610	29 5/8	752	11 1/16	281	7 1/16	179	4 1/2	114	8 3/4	222	25 15/16	659	5	127	9 5/32	233	23 3/8	594
	30	762	35 5/8	905	13 1/16	332	9 1/16	230	4 1/2	114	9 29/32	252	29 1/4	743	5	127	10 1/3	262	28 3/4	730
	36	914	41 5/8	1057	15 1/16	383	11 1/16	281	4 1/2	114	11 1/32	280	34 1/2	876	5	127	11 7/16	291	33 15/16	862
	42	1067	47 5/8	1210	17 1/16	433	13 1/16	332	4 1/2	114	12 3/16	310	39 3/4	1010	5	127	12 5/8	321	39 1/4	997
	48	1219	53 5/8	1362	19 1/16	484	15 1/16	383	4 1/2	114	13 11/32	339	45 1/16	1145	5	127	13 3/4	349	44 1/2	1130
	54	1372	59 5/8	1514	21 5/16	541	17 1/16	433	4 1/2	114	14 1/2	368	50 9/16	1284	5	127	14 7/8	378	50	1270
	60	1524	65 5/8	1667	23 5/16	592	19 1/16	484	4 1/2	114	15 5/8	397	55 7/8	1419	5	127	15 7/8	403	55 1/4	1403





























# Roller

## DATA SHEET


## IDLER SCHEMES

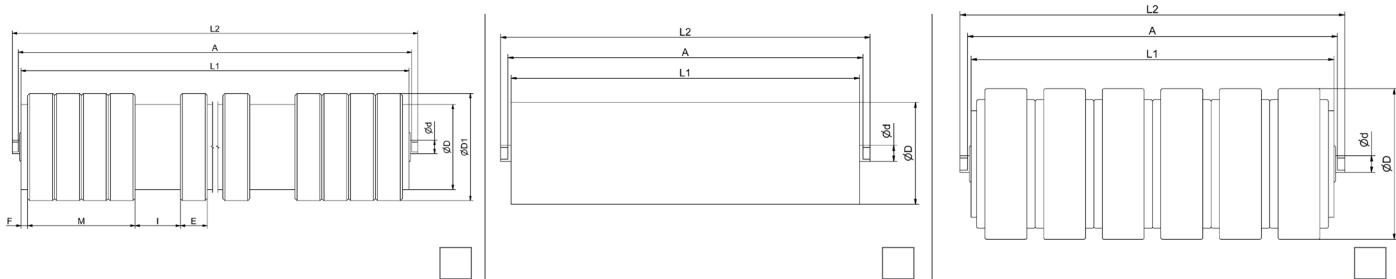

## IDLER STATIONS

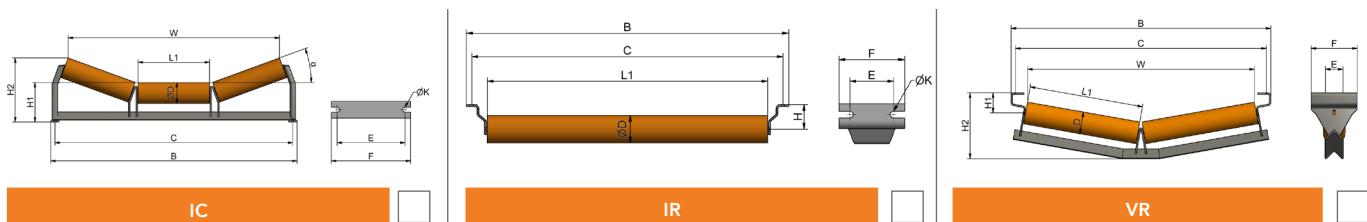

## TYPES OF SHAFT ENDS

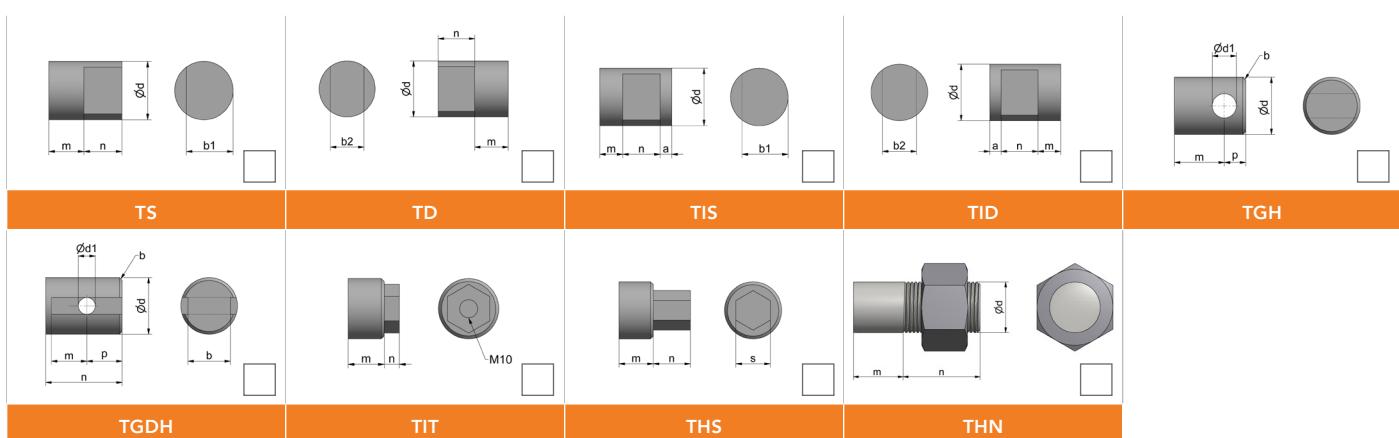

Idler Specifications	
	mm      in
L <sub>1</sub>	
L <sub>2</sub>	
A	
Ød	
ØD	
ØD <sub>1</sub>	
F	
M	
E	
I	

Idler Base Specifications	
	mm      in
W	
L <sub>1</sub>	
ØD	
C	
B	
H	
H <sub>1</sub>	
H <sub>2</sub>	
E	
F	
ØK	
a	

Shaft Ends Specifications	
	mm      in
ØD	
Ød	
Ød <sub>1</sub>	
n	
m	
H	
b <sub>1</sub>	
b <sub>2</sub>	
a	
p	
c	
i	
k	
e	
s	

Type: ..... Model or Series: .....

Observations: .....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

No. of rollers per Station ..... Unit  
Stations per Conveyor ..... Unit  
Distance between Stations ..... m

## COMMERCIAL OFFICES

---

### UNITED STATES OF AMERICA

Email: sales@lufh-cbs.com

Address: 3508 NW 114 Ave, Doral, FL 33178, USA.

### UNITED ARAB EMIRATES

Email: sales@lufh-cbs.com

Address: Po box 16686, Ras Al Khaimah, UAE.

### VENEZUELA

Email: sales@lufh-cbs.com

Address: Zona industrial los pinos, UD-301, Manzana Nro 28, Parcela Nro 9, Calle Nro 6, Galpón Nro 3, Puerto Ordaz, Estado Bolívar, Venezuela.

### COLOMBIA

Email: sales@lufh-cbs.com

Address: Calle 77, N° 59 - 35, Oficina 11-08, Edificio Las Américas 3, Barranquilla, Atlántico, Colombia.



WWW.LUFH-CBS.COM